


## WAFER TYPE S57

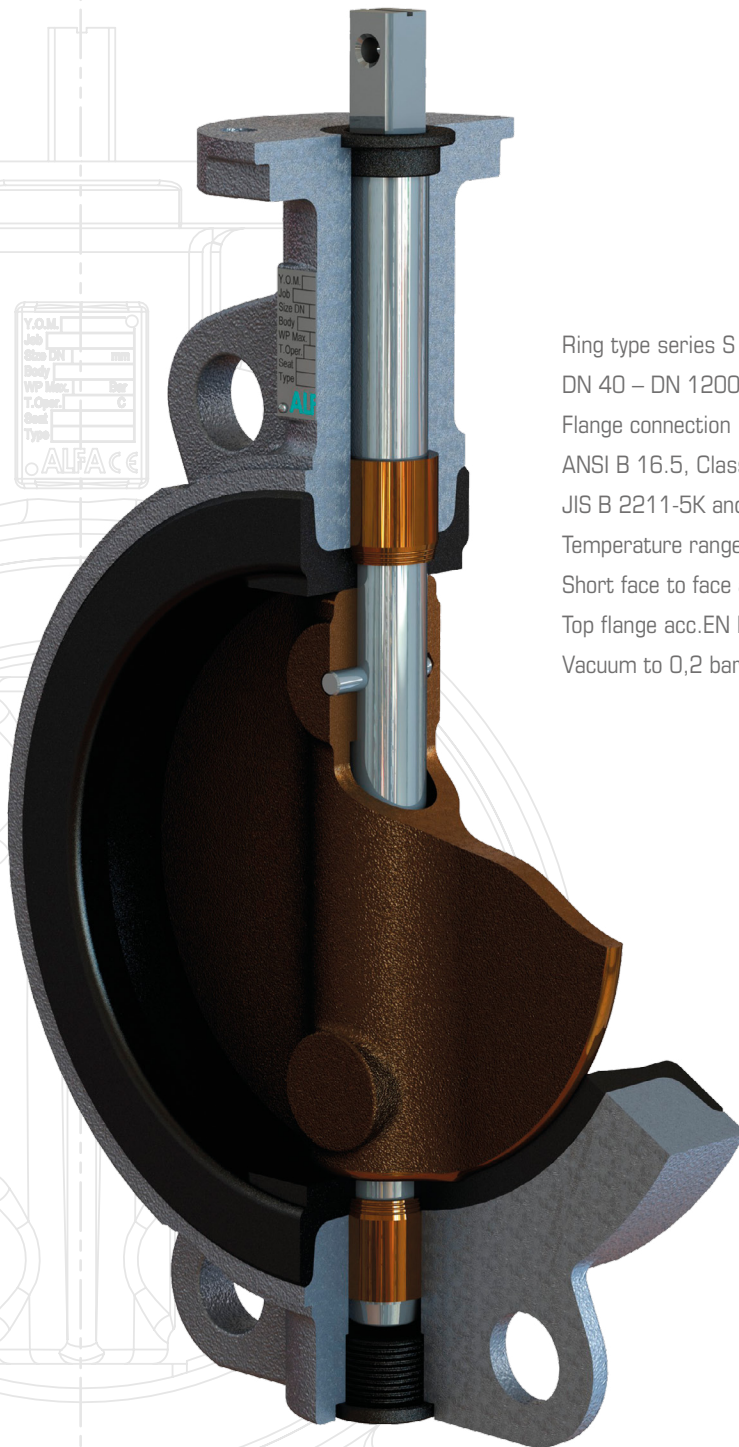

Ring type series S 57 Bonded liner

DN 40 – DN 1200

Flange connection : DIN 2501 PN 6-10-16 (PN25 up to DN 400)

ANSI B 16.5, Class 150

JIS B 2211-5K and 10K


Temperature range -10 to + 200 degrees C

Short face to face acc. EN 558.1 row 20

Top flange acc. EN ISO 5211

Vacuum to 0,2 bar absolute

## CONCENTRIC-, WATER TYPE BUTTERFLY VALVES

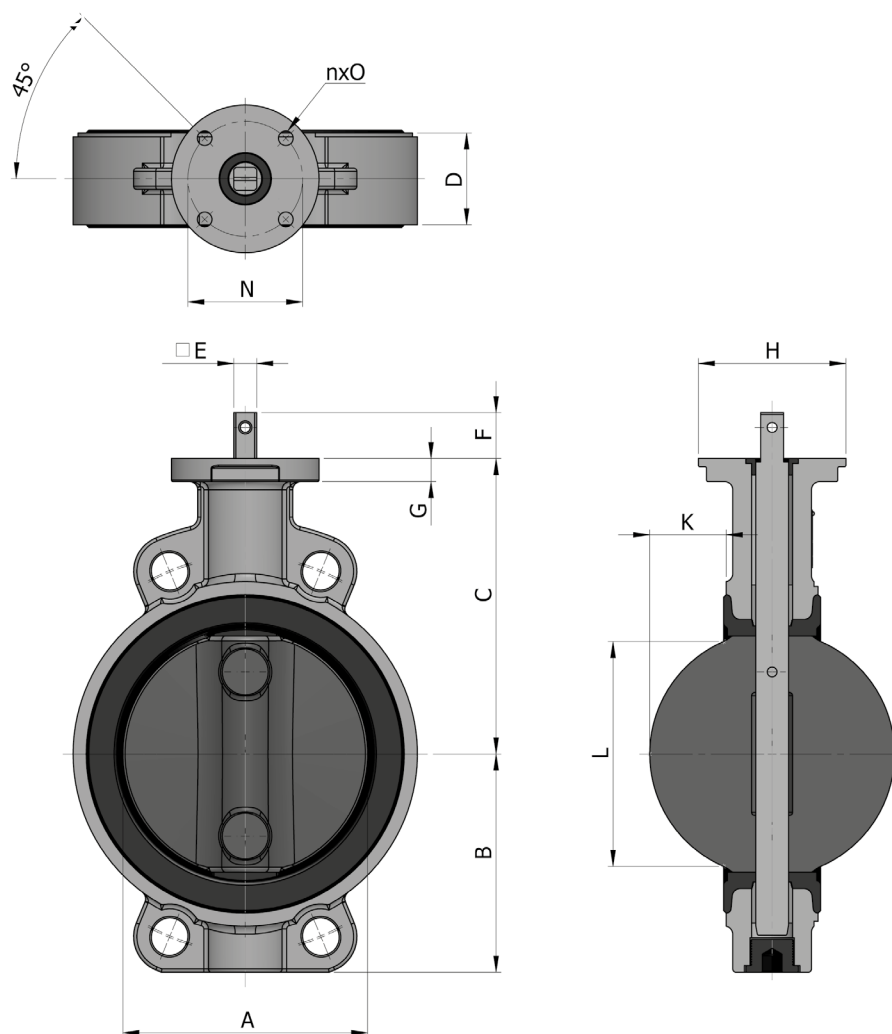

## WAFER TYPE S57

DN	NPS	øA	E	F	B	C	øH	D	N (PCD) (ISO 5211)	n x Ø	G	L	K	Weight +/-kg
40	1½"	40	11	25	61	113	90	33	ø70 (F07)	4 x ø9	12	23	3,5	2,2 kg
50	2"	52	11	25	67	118	90	43	ø70 (F07)	4 x ø9	12	30	4,7	2,4 kg
65	2½"	68	11	25	74	126	90	46	ø70 (F07)	4 x ø9	12	49	11	3,0 kg
80	3"	82	11	25	82	133	90	46	ø70 (F07)	4 x ø9	14	68	18	3,8 kg
100	4"	104	11	25	100	147	90	52	ø70 (F07)	4 x ø9	14	90	26	4,6 kg
125	5"	127	14	28	112	160	90	56	ø70 (F07)	4 x ø9	14	114	35	7,2 kg
150	6"	151	14	28	134	180	90	56	ø70 (F07)	4 x ø9	14	140	47	9,5 kg
200	8"	201	17	28	159	204	90	60	ø70 (F07)	4 x ø9	14	192	70	13,5 kg
250	10"	252	22	30	195	245	125	68	ø102 (F10)	4 x ø11	15	243	91	20,2 kg
300	12"	304	22	30	220	270	125	78	ø102 (F10)	4 x ø11	15	293	113	29,6 kg